




ProSAFE Plus 24-Port Gigabit Switch JGS524Ev2

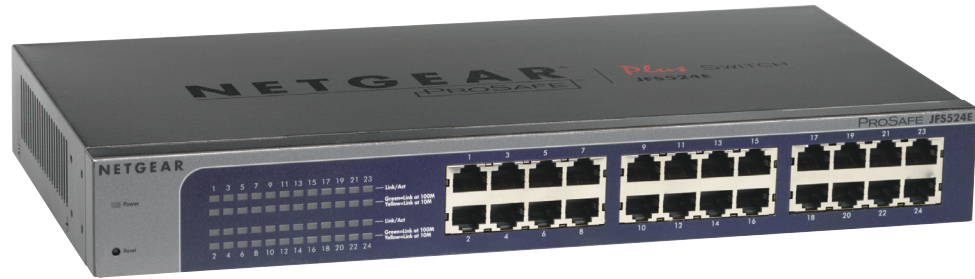


Step 1. Connect equipment.

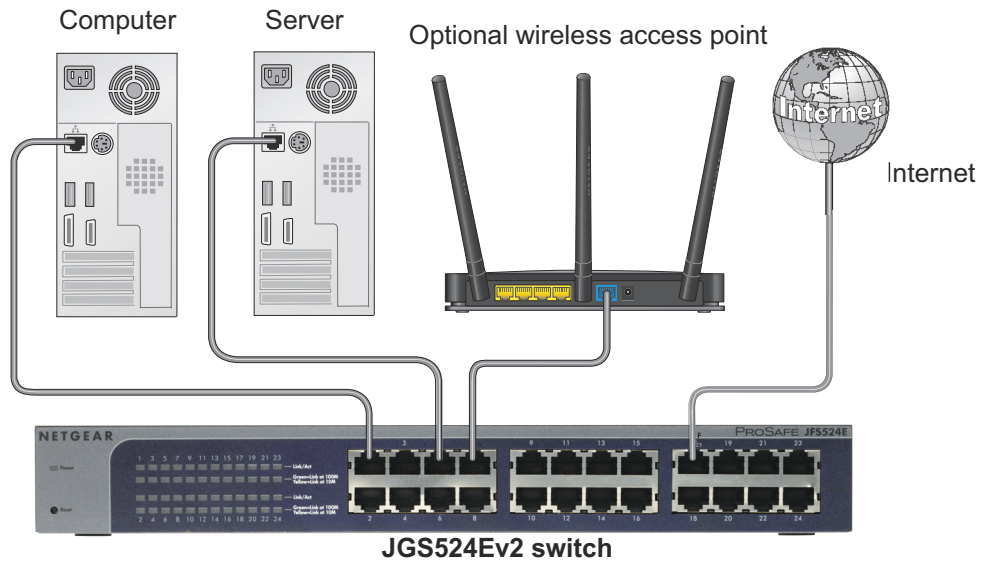

Step 2. Connect power.

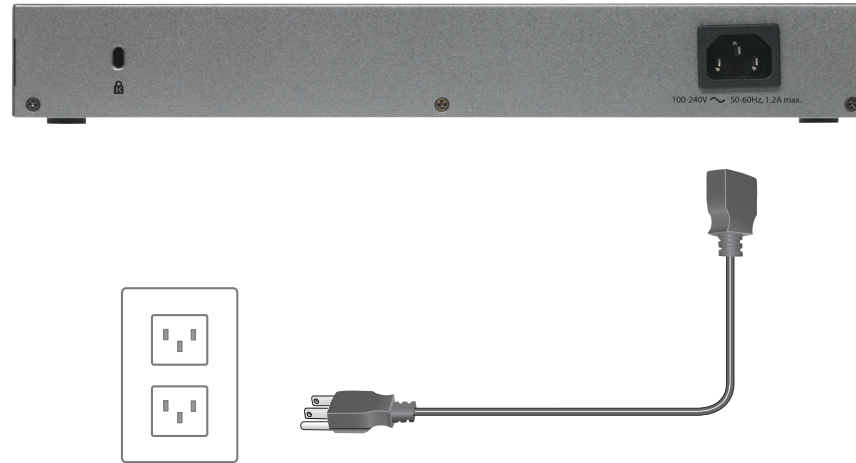

Step 3. Check status.



Power LED



On



Off

Port Link/ACT LEDs



Link



Activity (blinking)



No link (off)

Port Speed LEDs



1000 Mbps



100 Mbps



10 Mbps (off)

Set Up the Switch Configuration Utility

Plus switches are plug and play. You can install a configuration utility to select additional options to manage and customize the switch for your network. This utility is on the resource CD that was shipped with the switch.

Note: The configuration utility is installed on your computer and is supported on only Windows computers.

To install the configuration utility:

1. Insert the resource CD into a computer that is connected to the switch.
2. Click **Install ProSAFE Plus Utility** and follow the prompts to install the program.

The switch configuration utility is installed in the program directory of your computer and a **ProSAFE Plus Utility** icon is placed on your desktop.

To configure the switch:

1. Double-click the **ProSafe Plus Utility** icon.

The configuration home screen displays a list of plus switches that it discovers on the local network.

2. Select the switch that you want to configure.
You are asked to enter the password for the switch.
3. Enter the switch's password in the password field.
The switch's default password is password.
4. Use the utility to configure the switch.

For a description of plus features, see the *ProSAFE Plus Switch Utility User Guide*. You can access the user guide through links on the Help tab of the utility or on the resource CD.

Specifications

Specification	Description
Network interface	RJ-45 connector for 10BASE-T, 100BASE-TX, or 1000BASE-T
Network cable	Category 5e (Cat 5e) or better Ethernet cable
Ports	24
Power	100–240 VAC 50–60 Hz, 1.0A maximum
Power consumption	13.8W maximum
Weight	1.40 kg (3.09 lb)
Dimensions (W x D x H)	328 mm x 169 mm x 43.2 mm (12.91 in. x 6.65 in. x 1.7 in.)
Operating temperature	0–50°C (32–122°F)
Operating humidity	10%–90% relative humidity, noncondensing
Electromagnetic compliance	KC Class A, CCC Class A, FCC part 15 Class A, C-Tick Class A, CE Class A, VCCI Class A
Safety agency approvals	Commercial UL listed (UL 60950-1), CB, CE LVD

Support

Thank you for selecting NETGEAR products.

After installing your device, locate the serial number on the label of your product and use it to register your product at <https://my.netgear.com>.

You must register your product before you can use NETGEAR telephone support. NETGEAR recommends registering your product through the NETGEAR website. For product updates and web support, visit <http://support.netgear.com>.

NETGEAR recommends that you use only the official NETGEAR support resources.

For the current EU Declaration of Conformity, visit http://support.netgear.com/app/answers/detail/a_id/11621/.

CAN ICES-3 (A)/NMB-3(A)



201-17433-01

NETGEAR, Inc.
350 East Plumeria Drive
San Jose, CA 95134 USA

July 2013

NETGEAR, the NETGEAR logo, and Connect with Innovation are trademarks and/or registered trademarks of NETGEAR, Inc. and/or its subsidiaries in the United States and/or other countries. Information is subject to change without notice. © NETGEAR, Inc. All rights reserved.